

Product Data Sheet, February 2014

Makrolon® Silent Sound UV/AR

Solid polycarbonate sheet 8 mm



Your benefits:

- Tested safety according to ZTV-LSW06/EN 14388
- Noise reduction DL_T : 27 dB
- 8 mm sheet thickness with extended UV protection
- Good fire rating

Solid **Makrolon® Silent Sound** sheets are clear, polished, UV-stabilized polycarbonate sheets and available as extended UV and Abrasion-resistant version. They offer extreme impact strength that exceeds the physical properties of other products of their class. Makrolon® sheets resist temperatures of -100 to +120 °C, exhibit high optical clarity and have a good fire rating.

Makrolon® Silent Sound sheets meet the sound technical requirements for noise reduction and the demands of road safety, stability such as form and ageing stability.

Makrolon® Silent Sound UV can be bent cold and also manufactured flat.

Applications:

Makrolon® Silent Sound can be used for noise protection barriers on motorways with heavy traffic, dual carriageways and railways.

The sheets offer protection against involuntary breakage and wilfull destruction. **Makrolon® Silent Sound** sheets can be thermoformed, cold-curved and machined with ease.

	Test Conditions	Typical values ⁽¹⁾	Unit	Standard
PHYSICAL				
Density	water at 23 °C	1200	kg/m ³	ISO 1183-1
Water absorption saturation	23 °C, 50% relative humidity	0.30	%	ISO 62
Water absorption equilibrium	Procedure A	0.12	%	ISO 62
Refractive index		1.587	–	ISO 489
MECHANICAL				
Tensile modulus	1 mm/min	2350	MPa	ISO 527-1,-2
Yield stress	50 mm/min	> 60	MPa	ISO 527-1,-2
Yield strain	50 mm/min	6	%	ISO 527-1,-2
Nominal strain at break	50 mm/min	> 50	%	ISO 527-1,-2
Flexural modulus	2 mm/min	2350	MPa	ISO 178
Flexural strength	2 mm/min	90	MPa	ISO 178
Charpy impact strength	23 °C, unnotched	non-break	kJ/m ²	ISO 179-1eU
Charpy impact strength	23 °C, 3 mm	80P	kJ/m ²	ISO 179-1eA
Izod impact strength	23 °C, 3.2 mm, notched	90P	kJ/m ²	ISO 180-A
THERMAL				
Vicat softening temperature	50 N, 50°C/h	148	°C	ISO 306
Thermal conductivity	23°C	0.20	W/(m.K)	ISO 8302
Coefficient of linear thermal expansion	23 to 55°C	0.65	104/K	ISO 11359-1, -2
Temperature of deflection under load	1.80 Mpa	128	°C	ISO 75-1, -2
Temperature of deflection under load	0.45 Mpa	140	°C	ISO 75-1, -2
ELECTRICAL				
Electrical strength	1 mm	34	kV/mm	IEC 60243-1
Volume resistivity		1E14	Ohm.m	IEC 60093
Surface resistivity		1E16	Ohm	IEC 60093
Relative permittivity	100 Hz	3.1	–	IEC 60250
Relative permittivity	1 MHz	3.0	–	IEC 60250
Dissipation factor	100 Hz	5	10 ⁻⁴	IEC 60250
Dissipation factor	1 MHz	95	10 ⁻⁴	IEC 60250

⁽¹⁾ These values are measured on injection molded samples, and are not intended for specification purposes.

Product Liability Clause: This information and our technical advice – whether verbal, in writing or by way of trials – are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided – especially that contained in our safety data and technical information sheets – and to test products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery.

Makrolon® is a registered trademark of Bayer AG

MF 0286 e




makrolon®
Silent Sound

Makrolon® Silent Sound UV/AR

Solid polycarbonate sheet 8 mm



Ideas, innovative, intelligent, interesting... Bayer MaterialScience i-line represents the next generation of quality products. This seal guarantees innovative and intelligent first-class solutions at all times for a multitude of requirements.

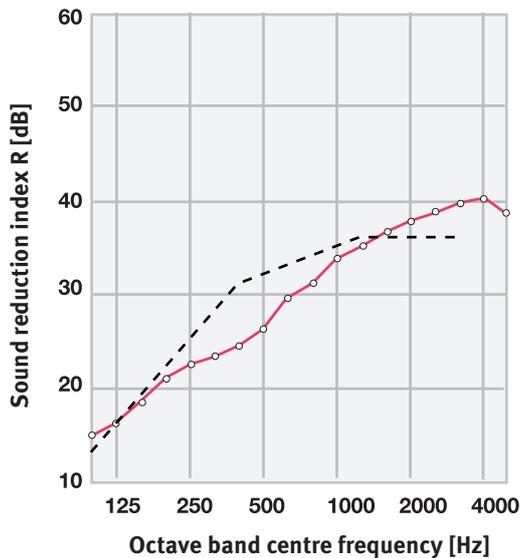

RESULTS dB [EN ISO 140-3]

Sum of deviation	28.5
Average deviation	1.78
Displacement designated curve	-18
Sound reduction index R_w	32

SPECTRUM ADAPTATION TERMS

	C	C_w
100 - 3,150 Hz	-1	-5
100 - 5,000 Hz	-1	-5
50 - 3,150 Hz	-1	-5
50 - 5,000 Hz	-1	-5
$\Delta L_{A,R,Str}$ (ZTV-LSW 88)		30
DL_R (DIN EN 1793-2)		27 (B3)

EUROPEAN CERTIFICATES for Makrolon® Silent Sound UV

Resistance to brushwood fire according to (*):

DIN EN 1794-2, Annex A: Class 2
ZTV-LSW 06, Section 2.5.4

Impact of Stones according to:

DIN EN 1794-1, Annex C: Passed

Danger of falling debris according to:

DIN EN 1794-2, Annex B: Class 3

(*) Fire certificates are limited in time and scope, always check if the mentioned certificate is valid for the purchased Polycarbonate sheet type at the date of delivery. Polycarbonate sheets may change their fire behavior due to ageing and weathering. The indicated fire rating was tested on new / unweathered Product in accordance with the indicated fire classification standards.



Bayer MaterialScience

Bayer MaterialScience GmbH
Otto-Hesse-Straße 19/T9, 64293 Darmstadt, Germany
Tel. +49 6151 13 03-0
Fax +49 6151 13 03-500

www.bayersheeteurope.com