

Product data sheet, July 2013

# Makrolon® multi UV 5M/25-20

## Multiwall polycarbonate sheet



### Your benefits:

- extremely heat-insulating
- high stiffness
- good load bearing capacity



**Makrolon® multi UV 5M/25-20** is a polycarbonate sheet of 25 mm thickness, with a M-structure for enhanced stiffness. It combines good load bearing properties, good thermal insulation, light transmission and excellent weather resistance. The sheet is lightweight, impact resistant and easy to install.

**Makrolon® multi UV 5M/25-20** is ideal for flat glazing applications.

- conservatories
- industrial glazing, sports halls
- partition walls
- skylights, northlight glazing
- roofing, cladding

The sheets are produced with a coextruded UV-protective layer, which is homogeneously fused with the sheet material. This UV-protected side must be installed facing upwards/outwards. It provides **Makrolon® multi UV** with a highly effective protection against weathering, guaranteed for 10 years.


On request:

### IQ-Relax

**Makrolon® multi IQ-Relax** are opal white sheets, which dramatically reduce the heat of the sunlight, allowing the visible light to pass through. More light, less heat!

### TECHNICAL DATA (TYPICAL VALUES)

Area weight	3.4 kg/m <sup>2</sup>	
Sheet width	980, 1,200, 1,230 mm	
Possible delivery lengths	2,000 to 6,000 mm	
Light transmittance $\tau_{D65}$ (UV-absorbing)	clear 1099: white 1146: IQ-Relax: bronze 1845: CC blue 1555: CC green 1655: CC grey 1725:	approx. 49 % approx. 40 % approx. 32 % approx. 13 % approx. 22 % approx. 34 % approx. 11 %
Total energy transmission g	clear 1099: white 1146: IQ-Relax: bronze 1845: CC blue 1555: CC green 1655: CC grey 1725:	approx. 48 % approx. 42 % approx. 34 % approx. 32 % approx. 35 % approx. 35 % approx. 25 %
Heat transfer coefficient $U_g$ <sup>(2)</sup>	1.4 W/m <sup>2</sup> K (vertical application) 1.4 W/m <sup>2</sup> K (horizontal application)	
Coefficient of thermal expansion $\alpha$	0.065 mm/m °C	
Possible expansion due to heat and moisture	3 mm/m	
Max. service temperature without load	120°C	
Weighted sound reduction index	18 dB	
Fire rating <sup>(1)</sup>	<ul style="list-style-type: none"> <li>• Europe           <ul style="list-style-type: none"> <li>clear 1099</li> <li>white 1146</li> <li>bronze 1845</li> </ul> </li> <li>• Germany           <ul style="list-style-type: none"> <li>clear 1099, white 1146</li> </ul> </li> </ul>	} B-s1, d0 (EN13501-1) B2 DIN 4102

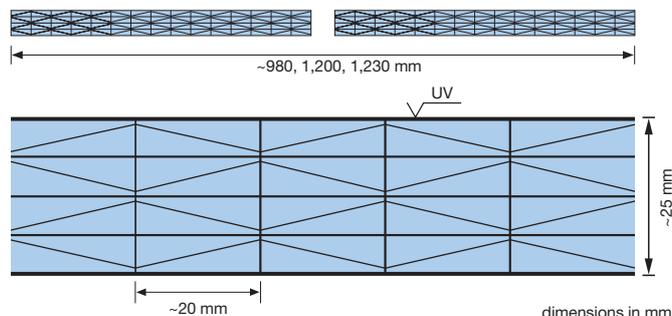

<sup>(1)</sup> Fire certificates are limited in time and scope, always check if the mentioned certificate is valid for the purchased Polycarbonate sheet type at the date of delivery. Polycarbonate sheets may change their fire behavior due to ageing and weathering. The indicated fire rating was tested on new / unweathered Product in accordance with the indicated fire classification standards, except for Product rated "B1" in accordance with DIN 4102.

<sup>(2)</sup> Heat transfer coefficient  $U_g$  according to EN ISO 10077-2

**Product Liability Clause:** This information and our technical advice – whether verbal, in writing or by way of trials – are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided – especially that contained in our safety data and technical information sheets – and to test products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery.

# Makrolon® multi UV 5M/25-20

## Multiwall polycarbonate sheet



Ideas, innovative, intelligent, interesting... Bayer MaterialScience i-line represents the next generation of quality products. This seal guarantees innovative and intelligent first-class solutions at all times for a multitude of requirements.


If **Makrolon® multi UV 5M/25-20** is used in applications of roofing or walling, the forces applied by wind and snow loads must be absorbed by a suitable sub-structure. We recommend taking the support distance for each load from the diagram.

The diagram shows the load bearing capacity for **Makrolon® multi UV 5M/25-20** (supported on all sides, rebate depth  $\geq 20$  mm). If the rebate depth is smaller, the support distances should be reduced suitably for the given load. For pure wind loads the loads may be increased by a factor of 1.1.

If sufficiently stable profiles are used, the load increases by a factor of 1.2. You can find further sheet widths and statements on barrel vaults in the Technical Manual.

### Load bearing characteristics (determination):


The system resistance (boundary state of load bearing capacity) of **Makrolon® multi UV 5M/25-20** was determined in accordance with European guideline ETAG 10 (European Technical Approval on "self-supporting light-transmitting roofing systems", which came into force in September 2002) in real tests. The characteristic values of system resistance were determined in an unfavorable system, i.e. the sheets were not fixed, but laid loosely. The loads are applied as uniformly distributed linear loads, i.e. load components acting vertically on the sheet, e.g. snow.



These values are guide values, which were determined in extensive tests on real systems carried out by the KPF in Erkelenz/Germany (testing, monitoring and certification centre recognized by the building inspectorate). Adequate safety values, which should be assessed on a case-by-case basis, are to be observed with regard to these values.

In general, experience has shown that a safety factor of 1.3 is adequate with regard to the measured resistance values. This safety factor is included in the load table and the diagram.

**These statements do not replace the specified national certificates, e.g. building inspectorate approval (Bauaufsichtliche Zulassung Germany), Avis Techniques (France), etc.**

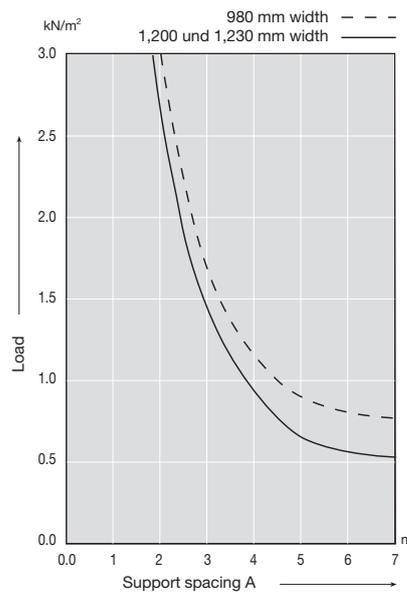

Load	kN/m <sup>2</sup>	0.5	0.75	1.0	1.5	2.0	3.0	Width in mm
Length or support spacing A	m	∞	∞	4.5	3.3	2.6	2.0	980
	m	∞	4.5	3.8	3.0	2.5	1.8	1,200 und 1,230

Bayer MaterialScience also produces solid sheets in polycarbonate (Makrolon® GP) and in polyester (Vivak® and Axpert®). For more information, take a look at [www.bayersheeteurope.com](http://www.bayersheeteurope.com).



## Bayer MaterialScience

Bayer MaterialScience GmbH  
 Otto-Hesse-Straße 19/T9, 64293 Darmstadt, Germany  
 Tel. +49 6151 13 03-0  
 Fax +49 6151 13 03-500

[www.bayersheeteurope.com](http://www.bayersheeteurope.com)